

# THE WHITESIDE CANOPY

## Data Sheet

The Whiteside is a cost effective structure which has an unlimited length, enabling it to provide extensive cover from the weather. It is perfect for use as a free standing canopy or entrance canopy within a wide range of setting including schools, colleges, hospitals, care homes and industrial areas.

### Dimensions:

Length:	Unlimited
Width:	Up to 4 metres
Height:	To your specification
Spacing Between Posts:	Up to 4 metres



0800 389 9072

[www.ablecanopies.co.uk](http://www.ablecanopies.co.uk)  
[sales@ablecanopies.co.uk](mailto:sales@ablecanopies.co.uk)

### Features:

Wall Mounted or Free Standing:	Available as wall mounted or free standing
Suitable for:	Education   Hospitality   Leisure   Retail   Commercial   Healthcare
Guarantee:	N/A
Life Expectancy:	Up to 25 Years
Maintenance:	Requires only periodic cleaning
Installation Type:	Permanent
Retractable/Collapsible:	No
Method of Fixing:	Posts are installed into the ground with steel base plates into 300mm x 300mm x 600mm pad stones

### Frame Specifications:

Construction Material:	89mm x 3mm steel hollow tube section
Guttering:	None as standard - available at an additional cost
Frame Finish:	Powder coated Also available galvanised at an additional cost
Colour Options:	Supplied in any standard RAL colour Other RAL colours are available however, they may incur additional costs
Fixings:	316 marine grade stainless steel fixings

### Roof Specifications:


Roof Frame:	Steel roof frame with steel roof bars and aluminium rafter bars
Roof Covering:	Choice of 5mm solid or 16mm structured polycarbonate panels
UV Protection:	Over 98%   This also means the roof panels will not turn yellow over time due to UV degradation
Light Transmission:	The 16mm polycarbonate offers 73% for clear panels and 35% for opal panels The 5mm polycarbonate offers 92% for clear panels and 47% for opal panels
Strength:	Vandal and shatter resistant   200 times stronger than glass
Colour Options:	Available in clear and opal
Temperature Resistance:	From -20°C to +100°C

## International Standards:

**Fire Ratings:** Roof panels: European standard BS476 Part 7 class 1 fire and EN 13501 B-S1, D0.

**CE Marked** Yes to UKCA BS EN1090-1:2009+A1:2011

## Colour Options:

	Standard Colours	Non Standard Colours (Additional costs may apply)
<b>Steel Framework</b>	Our standard RAL colours are: 	Any RAL colour
<b>Aluminium Roof Rafter Bars</b>		Any RAL colour
<b>Polycarbonate Roof Covering</b>		N/A

## Weather Protection:




## Available Upgrades:

Post Pads	✓
Signage	✓
Polycarbonate Side & Front Fills	✓
Tensile Fabric Side Panels	✗
Rainbow Package	✓
Roller Shutters	✗
Coloured Polycarbonate	✗
Guttering and uPVC downpipes	✓
Gable Ends	N/A

## Technical Files Available:

PDF CAD File	✓
DXF CAD File	✓
IGES CAD File	✓
STL CAD File	✓
BIM File	✓
NBS Spec	✓

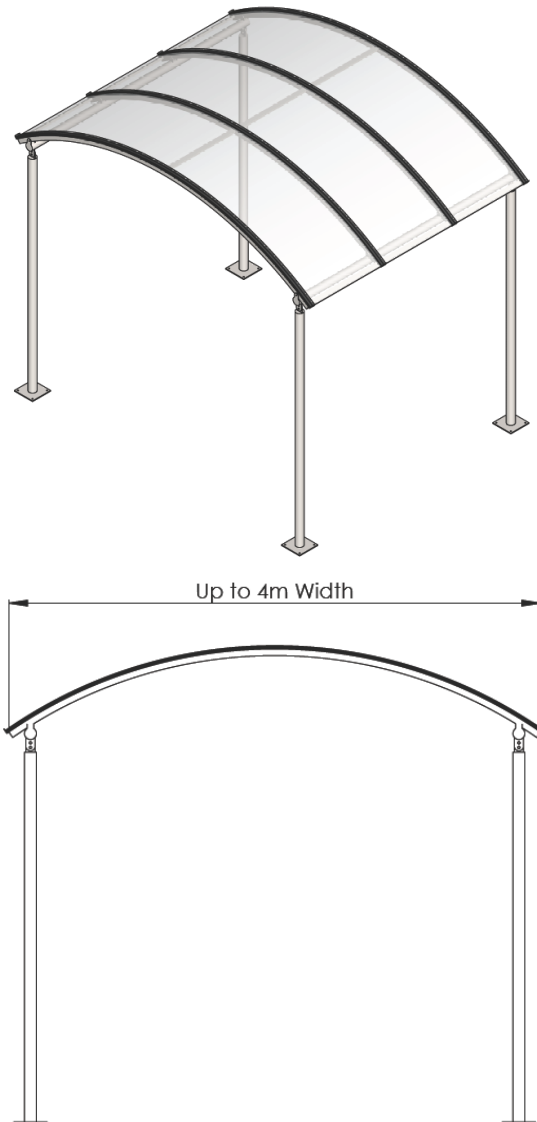

0800 389 9072

[www.ablecanopies.co.uk](http://www.ablecanopies.co.uk)

[sales@ablecanopies.co.uk](mailto:sales@ablecanopies.co.uk)

9-11 Faraday Close, Gorse Lane Industrial Estate, Clacton on Sea, Essex CO15 4TR

V1 LU211221